

FSB 22 Fire-Safe Mounting Pad 2-Piece

Full Port Ball Valves

1/4" – 2" (DN8 – DN50)

2000 psi (138 bar)

2 1/2" – 4" (DN65 – DN100)

1500 psi (103 bar)



FIRE-SAFE



ANTI-STATIC



2014/68/EU



SAFETY

360° All Around Welding

In applications where economical fire-safe ball valves are required, DIE ERSTE Series FSB 22 is the first choice. The Series FSB 22 has been fire-safe approved and certified with API 607 4th edition. In addition to the general fire-safe design, Series FSB 22 has special 360° all around welding design to prevent external leakage. The end cap is welded together around the valve body, and cannot be separated permanently. The fire-safe design provides high pressure rating and higher temperature endurance.

In process industries, petroleum and flammable applications often require fire-safe equipments. For ideal fire-safe valves, DIE ERSTE offers Series FSB 22 Mounting Pad 2-Piece Fire-Safe Full Port Ball Valve 2000psi, where maximum flow capacity and minimum pressure drops are required. Series FSB 22 meets API 607 4th Edition with fire-safe design, including fire-safe lip, graphite seals, and anti-static devices. The API 607 certification is designed to test soft seat quarter turn valves, where valves are tested under high temperature condition (above 750°C) for certain period of time.

The fire-safe design is consist of three elements: fire-safe lip, graphite seals, and anti-static devices. Fire-safe lip is a precise machined metal ring to fit with the valve ball after the soft ball seat has been decomposed by high temperature heat. The fire-safe lip acts as a metal seat, and together with the floating ball pushed by downstream, the tight-shutoff secondary seal is formed even without the presence of soft ball seat. In the body connection where main body and end cap are connected, DIE ERSTE offers dual body seal to achieve non-leakage externally. DIE ERSTE also provides anti-static device for all FSB 22 ball valves. Small metal ball and spring are inserted into the bottom and the side of valve stem. With anti-static device, charges caused by valve operation can be discharged and grounded, and eventually to prevent explosion by electric charges.

Certifications of Series FSB 22



API 607 Fire Test for Soft seated Quarter Turn Valves



Canadian Registration Number



ATEX Directive 2014/34/EU Explosive Prevention



SIL3 Capable Please inquire

CE Marking

The whole series of ball valves are approved according to European Directive 2014/68/EU.

Pressure Rating:

2000 psi (138 bar) for 1/4" - 2"
1500 psi (103 bar) sizes above 2"
150 psi (10 bar) with saturation steam

Temperature Range:

-20°F to 350°F (-28°C to 176°C) with PTFE/RPTFE

Size Range

1/4" ~ 4" (DN8 ~ DN100)

Body Material:

ASTM CF8M, CF8, WCB
(DIN 1.4408, 1.4308, 1.0619)

End Connection:

Female pipe thread to NPT, DIN259/2999, and BS standards


Standards and Specifications

Valve body and end cap connections are high quality investment casting. Stainless steel material and carbon steel can be solution annealed and normalized upon requests. Valve stems are blow-out proof for maximum safety. All valves are factory tested to API 598 and MSS SP-72. Series FSB 22 are approved by API 607 4th Edition Fire-Safe Test.


Fire-Safe Approved Design

The integral fire-safe lip is designed and manufactured precisely to fit the valve ball. With the fire-safe lip, valve is able to operate after the PTFE seat has been deteriorated in fire. With the floating ball design, the valve ball and the fire-safe lip come in contact with each other and establish a metal-to-metal seal.

Valve Body Rating with Seat Material Plot

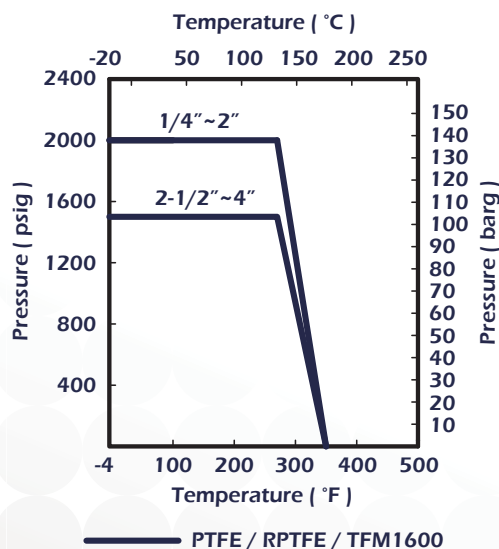

This table express Seat material resistance as declared by the original manufacturers. The values are to be considered with other parameters such as size, seat design and temperature limitations as governed by relevant standards such as ASME B16.34 or EN-12516.

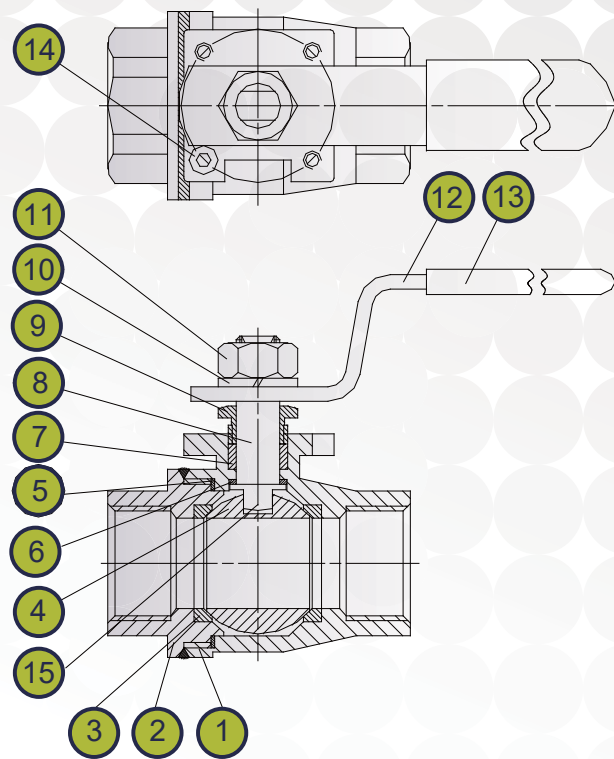


NO	PART NAME	MATERIAL
1	BODY	CF8M/ WCB
2	END CAP	CF8M / WCB
3	BALL SEAT	PTFE RPTFE TFM 1600
4	SOLID BALL	CF8M
5	BODY SEAL	PTFE & GRAPHITE
6	THRUST WASHER	GRAPHITE
7	STEM PACKING	GRAPHITE

NO	PART NAME	MATERIAL
8	STEM	SS 316
9	GLAND NUT	SS 304
10	SPRING WASHER	SS 304
11	NUT	SS 304
12	HANDLE	SS 304
13	HANDLE SLEEVE	VINYL
14	HANDLE NUT	SS 304
15	ANTI-STATIC	SS 316 / SS 304

Dimensions **inch/mm**

SIZE Inch DN	D	L	W	H	A	B	M	ISO 5211	Weight lbs Kg	Torque in.lbs Nm
1/4" 8	0.43 11	2.32 59	5.31 135	2.13 54	0.31 8	0.59 15	M5	F03	0.88 0.4	44.3 5
3/8" 10	0.49 12.5	2.32 59	5.31 135	2.13 54	0.31 8	0.59 15	M5	F03	0.66 0.3	44.3 5
1/2" 15	0.59 15	2.4 61	5.31 135	2.20 56	0.31 8	0.67 17	M5	F03	0.88 0.4	44.3 5
3/4" 20	0.79 20	2.87 73	5.31 135	2.52 64	0.39 10	0.79 20	M5	F03	1.32 0.6	88.5 10
1" 25	1.00 25.4	3.35 85	6.5 165	2.68 68	0.47 12	0.98 25	M5	F04	2.20 1.0	132.8 15
1 1/4" 32	1.26 32	3.82 97	6.5 165	2.91 74	0.47 12	0.98 25	M5	F04	3.09 1.4	177 20
1 1/2" 40	1.50 38	4.53 115	6.89 175	3.54 90	0.55 14	0.98 25	M6	F05	4.85 2.2	221.3 25
2" 50	1.97 50	5.28 134	6.89 175	3.94 100	0.55 14	0.98 25	M6	F05	8.38 3.8	265.5 30
2 1/2" 65	2.56 65	6.61 168	10.24 260	5.39 137	0.79 20	1.57 40	M8	F07	14.33 6.5	398.3 45
3" 80	3.15 80	7.52 191	10.24 260	5.79 147	0.79 20	1.57 40	M8	F07	26.01 11.8	486.8 55
4" 100	3.94 100	9.09 231	11.02 280	6.93 176	0.98 25	1.81 46	M10	F10	44.75 20.3	708.1 80

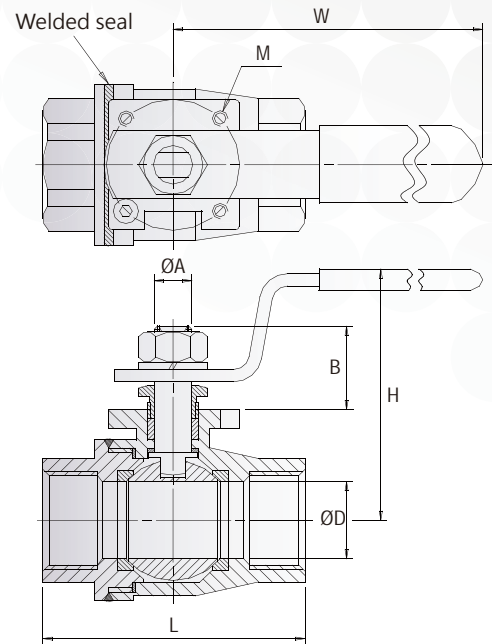

Note: Torque measured at ambient temperature with no loading; safety factor is not included.

Optional Accessories

Automation Accessories

FSB 22 includes mounting pad design. With brackets and connection parts, automation accessories can be combined with FSB 22. Currently, DIE ERSTE offers VT Series pneumatic actuators and JS Series electric actuator for selections.

How to order

VALVE TYPE	PORT	BODY MATERIAL	SEAT	TRIM	TYPE OF CONNECTION	PRESSURE RATING	SPECIAL REQUEST	SIZE OF CONNECTION	OTHERS
A	B	C	D	E	F	G	H	I	J



Taiwan
5F-1, No. 936,
Wen-Xin Rd., Sec. 4,
Taichung City 406, Taiwan
T +886 (4) 2231 0059
F +886 (4) 2236 0236

Shanghai
Rm. 1803-A, No.
678, Gu-Bel Rd.,
Shanghai, China
T +86 (21) 5777 3810
F +86 (21) 5777 3819

DIE-ERSTE INDUSTRY CO., LTD.
www.die-erste.com | sales@die-erste.com

Copyright © 2020 by DIE ERSTE INDUSTRY CO., LTD. CM-112/FSB 22 V5.1

Due to continuous development of the products, DIE ERSTE reserves the right to alter the dimension and information contained in the document as required without notice. For specific performance data and proper material selection, please consult with your DIE ERSTE representatives.