

Cast steel OS&Y Gate Valve to DIN PN25-F5, DN50~DN150

Series GTF PN25-F5

Features

- Cast steel body construction providing liberal strength to meet most conditions
- Integral yoke & bonnet; Outside screw & yoke, bolted bonnet
- Single flexible wedge disc compensates for deformation of body due to pipe stresses
- Seal welded seat ring eliminates leak path behind rings and for long trouble-free service
- Available in flanged end connection; butt weld end also available

PMA: 25 barg@50°C

TMA:425°C

Selection:

Material of Body:
DIN 17245 GS-C25

Standards


- Basic design to DIN 3352
- Face-to-Face acc. to DIN 3202-F5
- Flange Dimensions acc. to DIN 2544
- Inspection & test according to EN 12266-1

Note

- For non-horizontal installation, please ensure to consult with us separately, as special request must be generated to ensure proper function.

Materials List		
No.	PARTS NAME	MATERIALS
1	BODY	DIN 17245 GS-C25 + 13Cr
2	WEDGE	DIN 17245 GS-C25 + 13Cr
3	STEM	ASTM A182 F6a
4	BONNET BOLT	ASTM A193 B7
5	BONNET NUT	ASTM A194 2H
6	GASKET	SS304+FLEXIBLE GRAPHITE
7	BONNET	DIN 17245 GS-C25
8	STEM PACKING	FLEXIBLE GRAPHITE
9	GLAND EYEBOLT	ASTM A193 B7
10	GLAND NUT	ASTM A194 2H
11	PIN	AISI 1025
12	GLAND FLANGE	DIN 17245 GS-C25
13	NIPPLE	COPPER ALLOY
14	STEM NUT	ASTM A439 D2
15	RETAINING NUT	AISI 1025
16	HANDWHEEL	DUCTILE IRON
17	LOCK NUT	AISI 1025

* Enclosed is a condensed table. For complete options, contact DIE ERSTE directly.

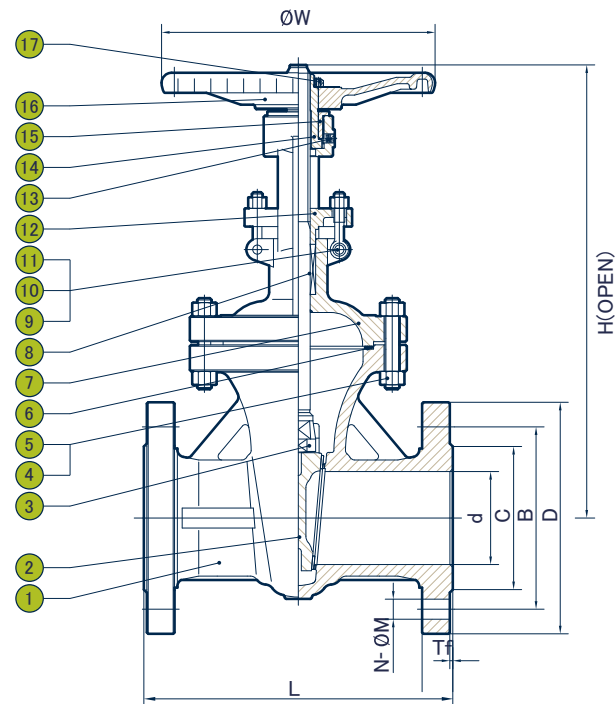

7

DIE ERSTE reserves the right to change product design and specifications without notice.
Copyright © 2023 by DIE ERSTE INDUSTRY CO., LTD.

Dimensions (mm)

Size		d	D	B	C	W	L	H	T	f	N	M
DN	IN											
50	2"	50	165	125	102	200	250	410	20	3	4	18
65	2½"	65	185	145	122	220	270	462	22	3	8	18
80	3"	80	200	160	138	250	280	518	24	3	8	18
100	4"	100	235	190	162	280	300	605	24	3	8	22
125	5"	125	270	220	188	300	325	678	26	3	8	26
150	6"	150	300	250	218	300	350	798	28	3	8	26

Cast steel OS&Y Gate Valve to DIN PN25-F5, DN200~DN600

Series GTF PN25-F5

Features

- Cast steel body construction providing liberal strength to meet most conditions
- Integral yoke & bonnet; Outside screw & yoke, bolted bonnet
- Single flexible wedge disc compensates for deformation of body due to pipe stresses
- Seal welded seat ring eliminates leak path behind rings and for long trouble-free service
- Available in flanged end connection; butt weld end also available

PMA: 25 barg@50°C

TMA: 425°C

Selection:

Material of Body:
DIN 17245 GS-C25

Standards

- Basic design to DIN 3352
- Face-to-Face acc. to DIN 3202-F5
- Flange Dimensions acc. to DIN 2544
- Inspection & test according to EN 12266-1


Note

- For non-horizontal installation, please ensure to consult with us separately, as special request must be generated to ensure proper function.

Materials List

No.	PARTS NAME	MATERIALS
1	BODY	DIN 17245 GS-C25 + 13Cr
2	WEDGE	DIN 17245 GS-C25 + 13Cr
3	STEM	ASTM A182 F6a
4	BONNET BOLT	ASTM A193 B7
5	BONNET NUT	ASTM A194 2H
6	GASKET	SS304+FLEXIBLE GRAPHITE
7	BONNET	DIN 17245 GS-C25
8	STEM PACKING	FLEXIBLE GRAPHITE
9	GLAND EYEBOLT	ASTM A193 B7
10	GLAND NUT	ASTM A194 2H
11	PIN	AISI 1025
12	GLAND FLANGE	DIN 17245 GS-C25
13	YOKE	DIN 17245 GS-C25
14	NIPPLE	COPPER ALLOY
15	STEM NUT	ASTM A439 D2
16	RETAINING NUT	AISI 1025
17	HANDWHEEL	DUCTILE IRON
18	LOCK NUT	AISI 1025

* Enclosed is a condensed table. For complete options, contact DIE ERSTE directly.

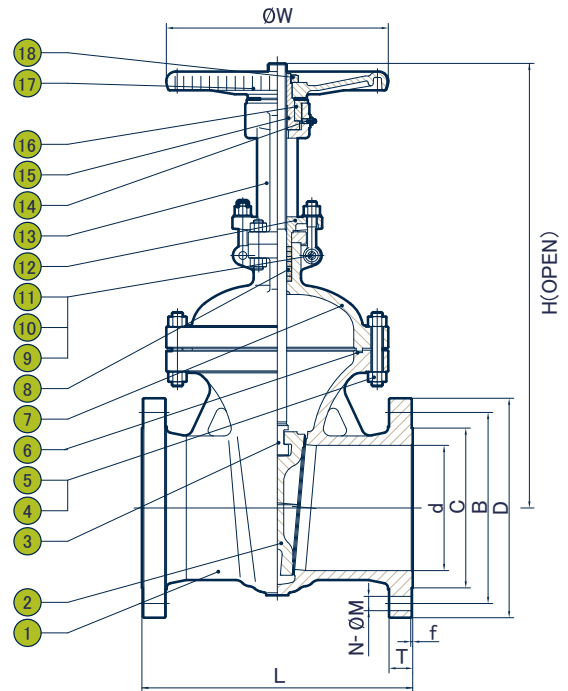

Dimensions (mm)

Size		d	D	B	C	W	L	H	T	f	N	M
DN	IN											
200	8"	200	360	310	278	350	400	985	30	3	12	26
250	10"	250	425	370	335	400	450	1114	32	3	12	30
300	12"	300	485	430	395	450	500	1340	34	4	16	30
350	14"	350	555	490	450	500	550	1550	38	4	16	33
400	16"	400	620	550	505	550	600	1700	40	4	16	36
500	20"	500	730	660	615	700	700	2110	44	4	20	36
600	24"	600	845	770	720	700	800	2540	46	5	20	39

Cast steel OS&Y Gate Valve to DIN PN25-F5, DN700~DN1000

Series GTF PN25-F5

Features

- Cast steel body construction providing liberal strength to meet most conditions
- Integral yoke & bonnet; Outside screw & yoke, bolted bonnet
- Single flexible wedge disc compensates for deformation of body due to pipe stresses
- Seal welded seat ring eliminates leak path behind rings and for long trouble-free service
- Available in flanged end connection; butt weld end also available

PMA: 25 barg@50°C

TMA: 425°C

Selection:

Material of Body:
DIN 17245 GS-C25

Standards

- Basic design to DIN 3352
- Face-to-Face acc. to DIN 3202-F5
- Flange Dimensions acc. to DIN 2544
- Inspection & test according to EN 12266-1


Note

- For non-horizontal installation, please ensure to consult with us separately, as special request must be generated to ensure proper function.

Materials List

No.	PARTS NAME	MATERIALS
1	BODY	DIN 17245 GS-C25 + 13Cr
2	WEDGE	DIN 17245 GS-C25 + 13Cr
3	STEM	ASTM A182 F6a
4	BONNET BOLT	ASTM A193 B7
5	BONNET NUT	ASTM A194 2H
6	GASKET	SS304+FLEXIBLE GRAPHITE
7	BONNET	DIN 17245 GS-C25
8	STEM PACKING	FLEXIBLE GRAPHITE
9	GLAND	ASTM A182 F6a
10	GLAND FLANGE	DIN 17245 GS-C25
11	BOLT	ASTM A193 B7
12	NUT	ASTM A194 2H
13	YOKE BOLT	ASTM A193 B7
14	YOKE NUT	ASTM A194 2H
15	YOKE	DIN 17245 GS-C25
16	STEM NUT	ASTM A439 D2
17	GEAR BOX	COMPONENTS

* Enclosed is a condensed table. For complete options, contact DIE ERSTE directly.

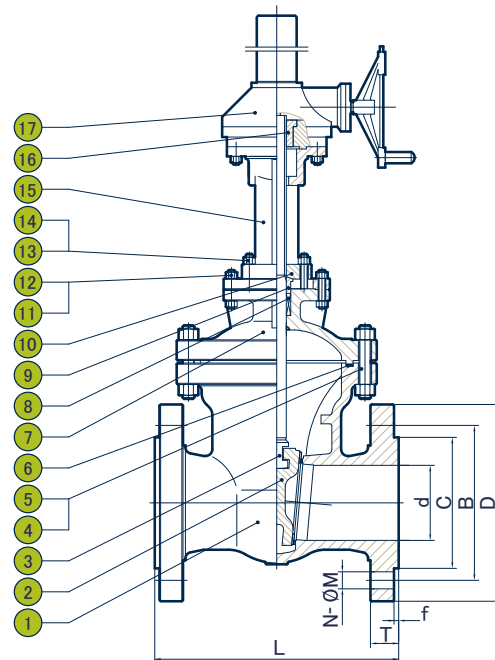

Dimensions (mm)

Size		d	D	B	C	L	T	f	N	M
DN	IN									
700	28"	700	960	875	820	900	50	5	24	42
800	32"	800	1085	990	930	1000	54	5	24	48
900	36"	900	1185	1090	1030	1100	58	5	28	48
1000	40"	1000	1320	1210	1140	1200	62	5	28	56